




C72

Handheld RFID Reader

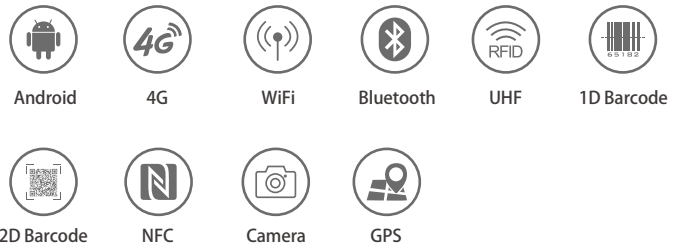

Chainway C72 is an Android rugged mobile computer. It features powerful processor, 8000mAh battery and superb UHF RFID capability. It can be equipped with Impinj E710 / R2000 linearly or circularly polarized antenna. That it can read tags in bulk from long distance enables it to be deployed in asset management, retail, warehousing, fleet management and etc.



Specification

Performance

Operating System	Android 11; GMS, FOTA, SafeUEM supported.
CPU	Cortex-A53 2.3 GHz Octa-core
RAM+ROM	3 GB + 32 GB / 4 GB + 64 GB (optional)
Expansion	Supports up to 128 GB Micro SD card

Communication

WLAN	IEEE802.11 a/b/g/n/ac, 2.4G/5G dual-band, internal antenna
Bluetooth	Bluetooth 5.0
GNSS	GPS/AGPS, GLONASS, BeiDou; internal antenna
WWAN	2G: GSM850/GSM900/DCS1800/PCS1900
	3G: WCDMA: B1/B2/B4/B5/B8 CDMA2000 EVDO: BCO TD-SCDMA: A/F
	4G: B1/B2/B3/B4/B5/B7/B8/B12/B17/B20/B28A/B28B/ B34/B38/B39/B40/B41

Physical Characteristics

Dimensions	164.2 x 80.0 x 24.3 mm / 6.46 x 3.15 x 0.96 in.
Weight	654 g / 23.07 oz.
Display	5.2" IPS LTPS 1920 x 1080
Touch Panel	Corning Gorilla Glass, multi-touch panel, gloves and wet hands supported
Power	Li-ion, rechargeable, 8000 mAh
	Standby: over 500 hours
	Continuous use: over 12 hours (depending on user environment)
Expansion Slot	Charging time: 3-4 hours (with standard adaptor and USB cable)
	1 slot for Nano SIM card, 1 slot for Nano SIM or TF card
Interfaces	USB 2.0 Type-C, OTG, Type-C headphones supported
Sensors	Light sensor, proximity sensor, gravity sensor
Notification	Sound, LED indicator
Audio	1 microphone; 1 speaker; receiver
Keypad	4 front keys, 1 power key, 2 scan keys, 1 multifunctional key

User Environment

Operating Temp.	-4 °F to 122°F / -20 °C to 50 °C
Storage Temp.	-40 °F to 158°F / -40 °C to 70 °C
Humidity	5% RH - 95% RH non condensing
Drop Specification	Multiple 1.5 m / 4.9 ft. drops (at least 20 times) to the concrete across the operating temperature range
Tumble Specification	1000 x 0.5 m / 1.64 ft. falls at room temperature
Sealing	IP65 per IEC sealing specifications
ESD	±15 KV air discharge, ±6 KV conductive discharge

Developing Environment

SDK	Chainway Software Development Kit
Language	Java
Tool	Eclipse / Android Studio

Data Collection

Camera

Camera	13 MP Autofocus with flash
--------	----------------------------

RFID (Optional)

UHF

Engine	CM710-1 module based on Impinj E710 CM2000-1 module based on Impinj Indy R2000
Frequency	865-868 MHz / 920-925 MHz / 902-928 MHz
Protocol	EPC C1 GEN2 / ISO18000-6C
Antenna	Circular polarization (4dBi), linear polarization(1.8dBi)
Power	1 W (30 dBm, +5 dBm to +30 dBm adjustable)
	2 W Optional (33 dBm, for Latin America, etc.)
Max Read Range	Impinj E710 chip: 26m (Impinj MR6 tag, size 70 x 15mm) 28m (Impinj M750 tag, size 70 x 15mm) 30m (Alien H3 Anti-Metal tag, size 130 x 42mm)
	Impinj R2000 chip: 24m (Impinj MR6 tag, size 70 x 15mm) 24m (Impinj M750 tag, size 70 x 15mm) 28m (Alien H3 Anti-Metal tag, size 130 x 42mm)
	Fastest Read Rate

* Ranges are measured in the open outdoors and low interference environment, and rate is measured in a laboratory low interference environment. They are affected by tags and environment.

Barcode Scanning (Optional)

1D Linear Scanner	Zebra: SE965; Honeywell: N4313
1D Symbologies	UPC/EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 of 5, Chinese 2 of 5, Codabar, MSI, RSS, etc.
2D Imager Scanner	Zebra: SE4710 / SE4750SR / SE4750MR / SE4750DP; Honeywell: N6603
2D Symbologies	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX), etc.

NFC (Optional)

Frequency	13.56 MHz
Protocol	ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc.
Chips	M1 card (S50, S70), CPU card, NFC tags, etc.
Range	2-4 cm

Accessories

Standard	AC Adaptor, USB Cable, etc.
Optional	Cradle, Holster, etc.

* For detailed specification, please check [Accessory Guide](#).